

# HemoCue® Hb 301 System



## Accurate POC Donor Hemoglobin Screening From the Pioneers

Optimized for anemia screening in blood donation settings, the HemoCue® Hb 301 system is a simple and convenient solution providing quick, easy access to lab-quality results without compromising accuracy.

With dedicated support and service as well as unmatched training and education based on over 30 years of experience, you can count on HemoCue for the right solutions for all your needs.

### Accuracy Starts With Us



To learn more about the HemoCue® Hb 301 system, please scan the QR code with your smartphone or visit [hemocue.com](http://hemocue.com)

### Have Confidence in Your Answers at the Point of Care

- ▶ Precise factory calibration against the ICSH reference method
- ▶ Patented microcuvette technology with excellent lot-to-lot reproducibility
- ▶ Robust testing within a wide range of temperatures and humidity
- ▶ Blood-based liquid controls available
- ▶ Industry leading 3 year warranty


### Get Easy Access to Lab-Quality Accuracy

- ▶ Capillary, venous or arterial whole blood sample
- ▶ Brief training with virtually no maintenance
- ▶ Link result with patient ID for medical record integration
- ▶ Printer interface




# HemoCue® Hb 301 System


Principle	Absorbance measurement of whole blood at an Hb/HbO <sub>2</sub> isobestic point; dual wavelengths (506 nm and 880 nm) for Hb measurement and turbidity compensation
Calibration	Factory calibrated against the ICSH reference method; needs no further calibration
Sample Material	Capillary, venous or arterial whole blood
Measurement Range	0–25.6 g/dL (0–256 g/L, 0–15.9 mmol/L)
Results	Within 10 seconds
Sample Volume	~10 µL
Dimensions	140×70×160 mm (5.51×2.76×6.29 inches)
Weight	500 g (1.10 pounds) with batteries installed
Storage Temp.	Analyzer: 0–50 °C (32–122 °F) Microcuvettes: unopened 10–40 °C (50–104 °F); short-term storage (6 weeks) –18–50 °C (0–122 °F); 12-month open vial stability
Operating Temp.	10–40 °C (50–104 °F)
Power	AC adapter or 4 AA batteries
Interface	Printer and HemoCue® Basic Connect™ including optional barcode scanner
Quality Control	Built-in "selftest", optional liquid controls
Product Item Number	Hb 301 Analyzer <b>121804US</b> Hb 301 Microcuvettes (200/box) <b>111801</b>

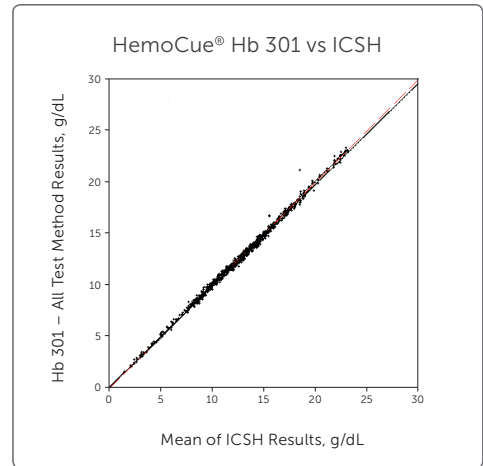


## Three Simple Steps



1 Fill microcuvette.



2 Place microcuvette into analyzer.



3 View results.

HemoCue America | California, USA  
Phone 800.881.1611 | Fax 800.333.7043 | [info@hemocue.com](mailto:info@hemocue.com) | [hemocue.com](http://hemocue.com)

HemoCue has been a leader in point-of-care medical diagnostics for over 30 years. We specialize in giving healthcare providers lab-quality accuracy with results comparable to that of a clinical lab.

